





LED VALUE SOLAR FLOODLIGHT

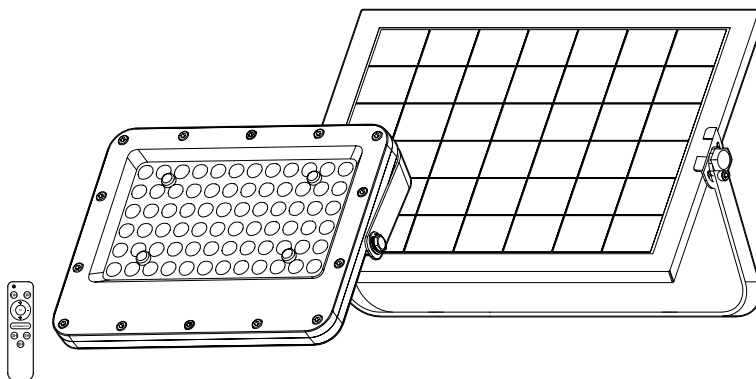


Model	Battery Type	Battery Parameter	Solar Panel Type	Solar Panel Parameter	Solar Panel Size (mm)	Lamp body Size (mm)	Projected Area (m²)	Max. Installing Height (m)	IP	IK	Operating Temperature	Weight
V-SOL-FL-100-730	LiFePO ₄	3.2V, 10AH	Monocrystalline	5-6V, 10W	350x235x17	222x160x23	0.08	6	66	08	-15°C...+55°C	1550g
V-SOL-FL-100-740	LiFePO ₄	3.2V, 10AH	Monocrystalline	5-6V, 10W	350x235x17	222x160x23	0.08	6	66	08	-15°C...+55°C	1550g
V-SOL-FL-100-765	LiFePO ₄	3.2V, 10AH	Monocrystalline	5-6V, 10W	350x235x17	222x160x23	0.08	6	66	08	-15°C...+55°C	1550g
V-SOL-FL-200-730	LiFePO ₄	3.2V, 20AH	Monocrystalline	5-6V, 20W	350x350x17	288x207x23	0.12	8	66	08	-15°C...+55°C	2355g
V-SOL-FL-200-740	LiFePO ₄	3.2V, 20AH	Monocrystalline	5-6V, 20W	350x350x17	288x207x23	0.12	8	66	08	-15°C...+55°C	2355g
V-SOL-FL-200-765	LiFePO ₄	3.2V, 20AH	Monocrystalline	5-6V, 20W	350x350x17	288x207x23	0.12	8	66	08	-15°C...+55°C	2355g
V-SOL-FL-300-730	LiFePO ₄	3.2V, 30AH	Monocrystalline	5-6V, 30W	530x350x17	354x249x23	0.19	10	66	08	-15°C...+55°C	3630g
V-SOL-FL-300-740	LiFePO ₄	3.2V, 30AH	Monocrystalline	5-6V, 30W	530x350x17	354x249x23	0.19	10	66	08	-15°C...+55°C	3630g
V-SOL-FL-300-765	LiFePO ₄	3.2V, 30AH	Monocrystalline	5-6V, 30W	530x350x17	354x249x23	0.19	10	66	08	-15°C...+55°C	3630g







LED VALUE SOLAR FLOODLIGHT

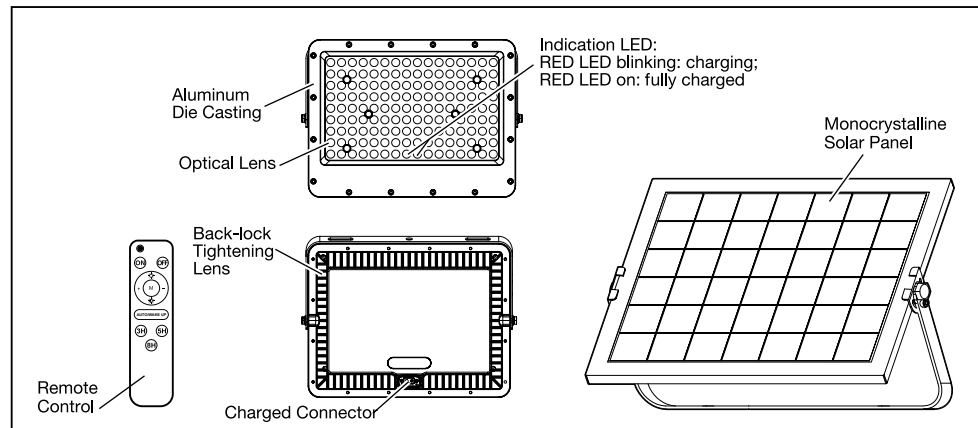

1




2

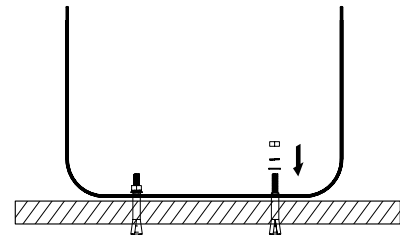


Fix the bracket of the solar panel on the mounting surface.

3

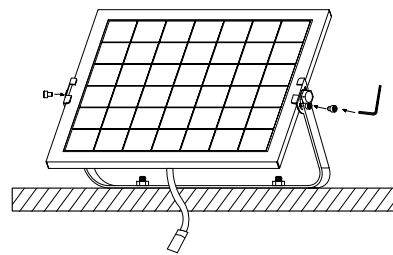

Adjust the solar panel to face the sunlight and fix it.

4

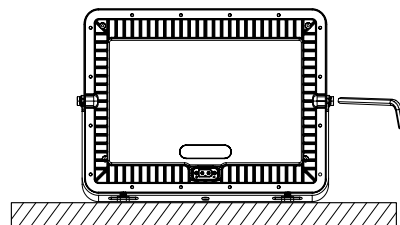

Fix the bracket of the lamp body.


2






LED VALUE SOLAR FLOODLIGHT

5

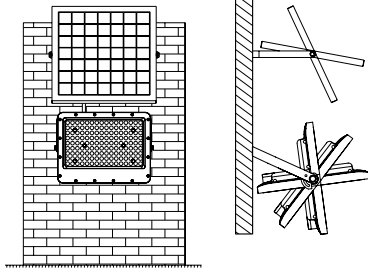


Fix the lamp body to the bracket, adjust the lamp body to the angle which is needed.

6



Connect the cable of the solar panel to the lamp body.

Remote control introduction

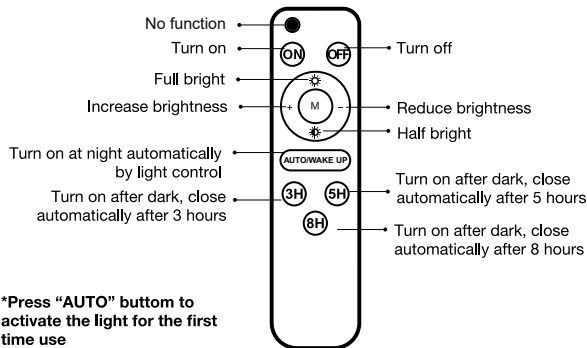

Charging and discharging (lighting mode):

- Time of fully charged by solar radiation is 5-8 hours, but there are many factors might affect it because of the usage way and the specific region situation.
- Discharge time (lighting mode):
 - 1st - 3rd hour: 100-60% brightness (uniform change)
 - 4th - 6th hour: 60-50% brightness
 - 7th - 10th hour: 20% brightness
 - 11th - 12th hour: 60% brightness until dawn
- Time function: 3H, 5H, 8H.
- Another mode is brightness adjustment mode, which is indicated on remote control.
- Best effect, recommended use of "AUTO" automatic mode.
- Usually power on (installed) is defaulted to automatic mode.
- Automatic mode: The brightness of the whole lamp can be adaptively controlled according to the battery's own power.





Li-ion WARNINGS:

- Please keep the fixture out of reach of children.
- Do not dispose of battery in fire. This may result in an explosion.
- Do not expose the light to fire or intense heat as the battery may explode.
- Do not immerse in water.
- Never look directly into the light or shine it into another person's eyes.
- Follow proper safety tips to prevent from falling off a ladder.
- Consult your local construction safety guide if needed for installing the light fixture on a building.
- The light fixture should be installed on a flat and stable surface.
- Avoid installing the light near an air conditioner, a central heater, or high voltage system.
- The solar charger board should be set in a sunny area where maximum sunlight can be collected. Typically, the solar board should face a direction (south) where sunlight can charge the board for at least 3 hours per day (5 hours per day if behind glass). It is suggested to charge the light for 24 hours before first use.
- Use a soft wet cloth to periodically (at least once a year) clean the charger board to avoid the reduction of power output due to accumulated dust.

تحذير:

- يرجى إبقاء المنتج بعيداً عن متناول الأطفال
- لا تتخلص من بطارية الليثيوم في القمامة العادية أو النفايات العامة أو بالنار لأنها يمكن أن تنفجر
- لا تفتح أو تقصر الدائرة الكهربائية أو تتلف البطاريات فقد تحدث إصابة
- حافظ على البيئة من خلال إعادة تدوير بطاريات الليثيوم أو التخلص منها وفقاً للمواصفات الانظمة المحلية
- لا تخلط بين البطاريات القديمة والجديدة
- للإستعمال الخارجي

-لا يجوز استبدال مصدر الضوء الموجود في هذا المصباح إلا من قبل الشركة المصنعة أو خدمته الوكيل أو أي شخص مؤهل.
-للحفاظ على الألواح الشمسية والعدسة خالية من الأتربة والرواسب عن طريق المسح بقطعة قماش جافة أو مياه دافئة مع صابون



DISPOSAL OF THIS PRODUCT:

This marking indicates that this product should not be disposed with other household wastes. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased to ensure an environmentally and friendly recycling.

للتخلص من هذا المنتج

- تشير هذه العلامة الى أنه لا ينبغي التخلص من هذا المنتج مع النفايات الأخرى لمنع الضرر المحتمل على البيئة أو صحة الإنسان من النفايات الخارجة عن السيطرة. أعد تدويرها بشكل مسؤول
- لتعزيز إعادة الاستخدام المستدام للموارد المادية.
- لإعادة جهازك المستخدم، يرجى استخدام أنظمة الإرجاع والتجميع أو الاتصال ببيئح التجربة الذي تم شراء المنتج منه.

LEDVANCE Pte. Ltd.
320 Serangoon Road #14-02,
Centrium Square 218108, Singapore.
Phone +65 6911 8260

LEDVANCE Sdn. Bhd. (1166537-U)
100.7.009, 129 Offices, Block J, Jaya One
No. 72A, Jalan Universiti,
46200 Petaling Jaya,
Selangor Darul Ehsan, Malaysia

(주)레드밴스
서울시 강남구 삼성로 554 예성빌딩 6층
(우편번호 06165)
전화번호: +82 80 489 1700
www.ledvance.co.kr

LEDVANCE Pvt. Ltd.
1201-1202, 12th Floor, Signature Towers,
Tower - A,
South City - I, Gurugram - 122001, Haryana (India)
Consumer care (Name and address as per above),
Consumer care Tel. No. 0124-4150100
E-mail id: customercare@ledvance.com
www.ledvance.in

LEDVANCE Prosperity Co., Ltd.
20/F, Cornell Centre, 50 Wing Tai Rd.,
Chai Wan, Hong Kong

LEDVANCE MIDDLE EAST FZE

Office No. LB040123
PO Box 17476, Jebel Ali Free Zone
Dubai, United Arab Emirates
Tel.: +971 4 881 37 67
Fax: +971 4 881 37 69

LEDVANCE Pty Ltd
ABN 34 050 103 181
Suite 2.1A
394 Lane Cove Road
Macquarie Park NSW 2113,
Australia
Ph +61 29481 8399/1300 467 726
www.ledvance.com.au

IP66 IK08 RoHS



C10449057
G11145010
2022-06-17

www.ledvance.com

