

LED T5 Batten Value HE Gen3 APM



Product feature

- Continuous Lighting
- Uniform illumination
- Offers in 3 different colors to fulfill different application needs (3000K/4000K/6500K)
- Beam angle: 120 Degree
- Two-plug connector
- Lifetime up to 20,000 h (L70/B50)@25°
- Mercury-free
- Power cable and connect cable will be sold as accessories
- Safety compliance certificates: CB
- 100lm/W, PF 0.9, 220~240V

Application

- Indoor Contour Lighting
- Cove Lighting
- Shelf Lighting
- Backlight

Main Spec

Type	Watt.	Lumen	CCT	Efficacy	Power Factor
300mm	3.4W	340lm	3000K 4000K 6500K	100 lm/W	0.9
600mm	6.5W	650lm	3000K 4000K 6500K	100 lm/W	0.9
900mm	9.6W	960 lm	3000K 4000K 6500K	100 lm/W	0.9
1200mm	13W	1300lm	3000K 4000K 6500K	100 lm/W	0.9



LED T5 Batten Value HE Gen3 APM

Main Specification

Electrical Data	Wattage (W)	3.4W	6.5W	9.6W	13W
	Rated Voltage (V)	220 – 240V			
	Power factor	0.9			
	Input current	17mA	31mA	43mA	65mA
	Line frequency (Hz)	50/60Hz			
	Protection class	Class II			
Optical / Photometric	Lumen (4000K/6500K)	340lm	650lm	960lm	1300lm
	Efficacy	100	100	100	100
	CCT (K)	3000K / 4000K / 6500K			
	CRI	≥80			
	LED	SMD 2835			
	Rated lifetime	20,000 hrs @ L70 (Ta=25°C)			
	Operating temperature	-20 - +35°C			
Mechanical	Size (LxWxH mm)	325×22.2×32.5	585×22.2×32.5	885×22.2×32.5	1185×22.2×32.5
	Housing material	PC			
	Housing color	White			
	Ingress protection	IP20			



LED T5 Batten Value HE Gen3 APM

Ordering guide

LEDVALUE BATTEN Value HE GEN3---APM version

Product description	IC	EAN10	EAN40	Shipping Unit
LDVAL BATHE 300 3.4W/3000K G324X1ENLEDV	AC235650055	4058075414266	4058075414273	24
LDVAL BATHE 300 3.4W/4000K G324X1ENLEDV	AC235660055	4058075414280	4058075414297	24
LDVAL BATHE 300 3.4W/6500K G324X1ENLEDV	AC235670055	4058075414402	4058075414419	24
LDVAL BATHE 600 6.5W/3000K G324X1ENLEDV	AC235680055	4058075414426	4058075414433	24
LDVAL BATHE 600 6.5W/4000K G324X1ENLEDV	AC235690055	4058075414440	4058075414457	24
LDVAL BATHE 600 6.5W/6500K G324X1ENLEDV	AC235700055	4058075414464	4058075414471	24
LDVAL BATHE 900 9.6W/3000K G324X1ENLEDV	AC235710055	4058075414488	4058075414495	24
LDVAL BATHE 900 9.6W/4000K G324X1ENLEDV	AC235720055	4058075414501	4058075414518	24
LDVAL BATHE 900 9.6W/6500K G324X1ENLEDV	AC235730055	4058075414525	4058075414532	24
LDVAL BATHE 1200 13W/3000K G324X1ENLEDV	AC235740055	4058075414549	4058075414556	24
LDVAL BATHE 1200 13W/4000K G324X1ENLEDV	AC235750055	4058075414563	4058075414570	24
LDVAL BATHE 1200 13W/6500K G324X1ENLEDV	AC235760055	4058075414587	4058075414594	24


**For APM version, Connection cable included in package, but for the power cable, client need to buy it separately.*

Please kindly find accessory ordering information in page4.

LED T5 Batten Value HE Gen3 APM

Ordering guide – Accessories


Product description	IC	EAN40	Shipping Unit	MOQ
LDVAL BAT POWER CABLE G3 VS20 LEDV	AC171140055	4058075282001	20 Pcs	20 PCs
LDVAL BAT CONNECT CABLE G3 VS20 LEDV	AC171150055	4058075282018	20 Pcs	20 PCs

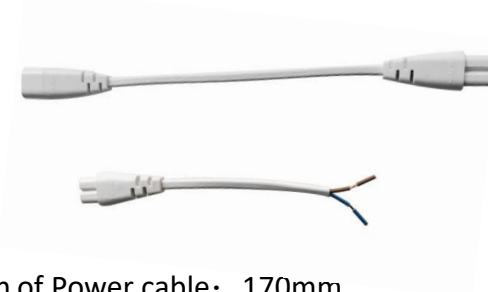

Length of Power cable: 170mm

Length of Connection cable: 265mm

Product drawing

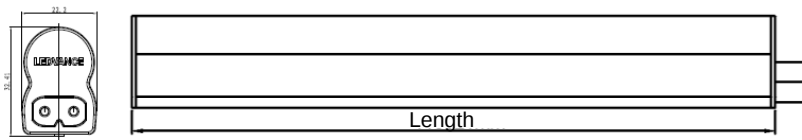

Type	Length
1 ft	325 mm
2 ft	585 mm
3 ft	885 mm
4 ft	1185 mm
1m	985mm

Max. connection allowed

Batten 1ft 3.4W – 30 pcs

Batten 2ft 6.5W – 15 pcs

Batten 3ft 9.6W – 10pcs

Batten 4ft 13W – 8 pcs

Or <104W mixed lengths